


RIPRAP TO BE PLACED
ON STREAM BANK.
QUANTITY AND SIZE AS
APPROVED BY ENGINEER

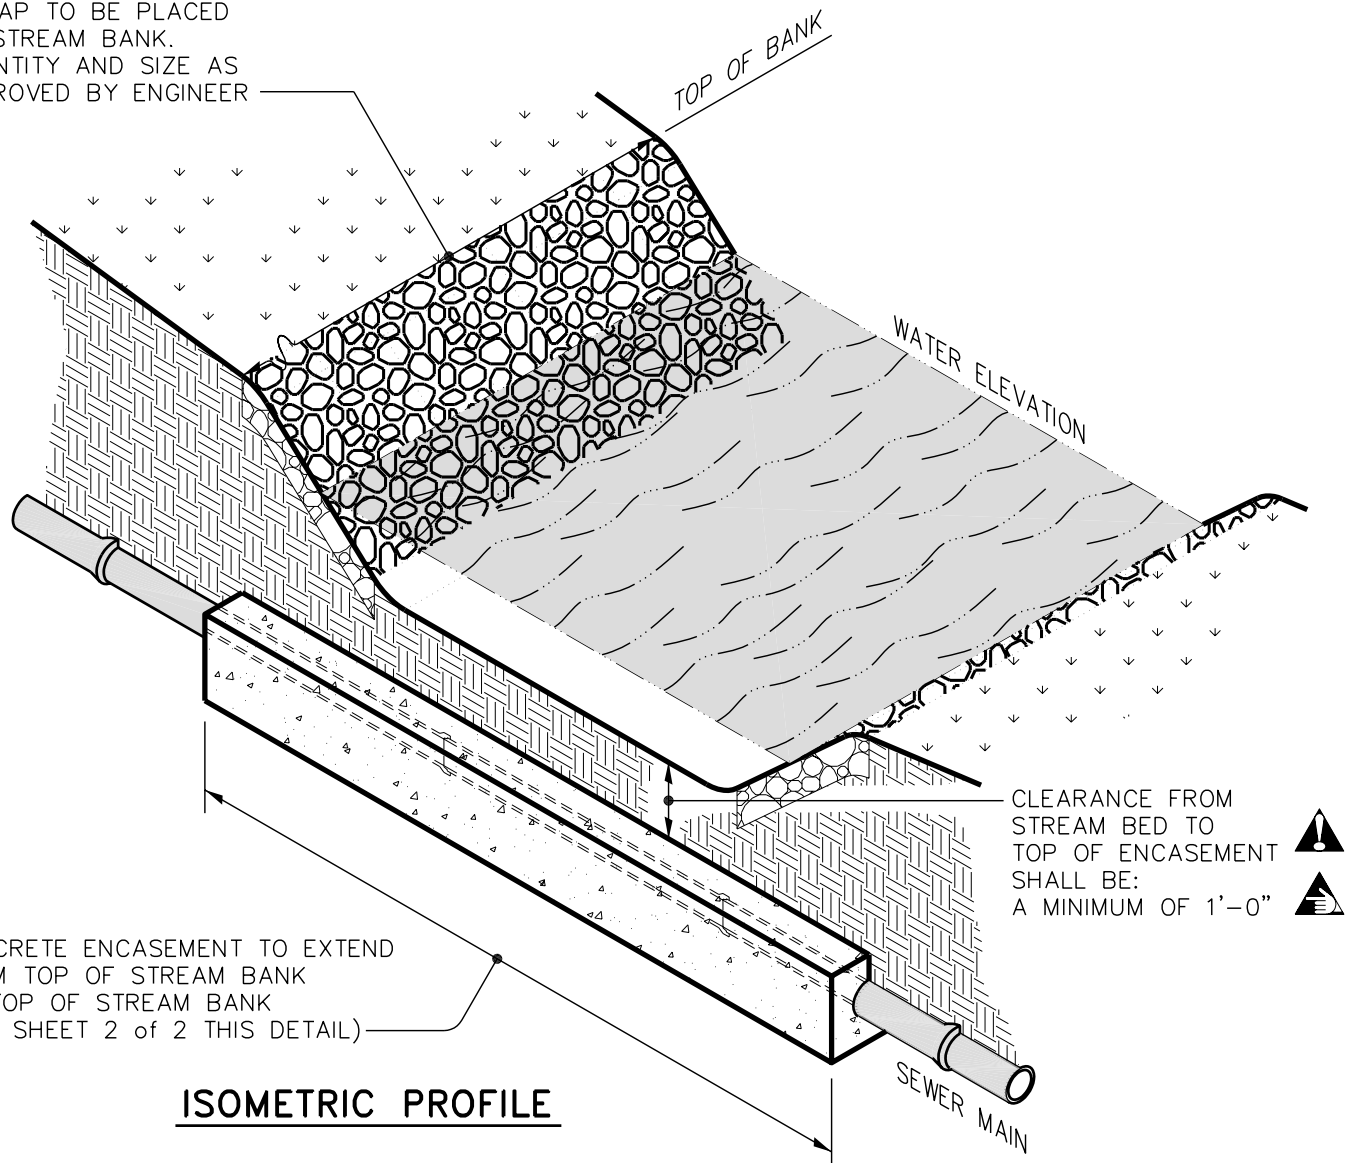

ISOMETRIC PROFILE

NOTES:

1. CONCRETE TO BE 3,000 PSI.
2. ENCASEMENT TO BE USED ONLY WHERE SPECIFIED ON PLANS.
3. PIPE SHALL BE DUCTILE IRON PIPE.
4. FILTER FABRIC TO BE PLACED UNDER RIP-RAP AND KEYED INTO EMBANKMENT.



THE CITY OF LYNCHBURG

SEWER LINE CROSSING BENEATH STREAM BED

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:
NOT TO SCALE

REVISION DATE:
04-10-03

DETAIL #
27.19

SHEET #:
1 OF 2